


Description	Specification
Ink Composition	Resin
Colours	Black, Red, White, Green, Blue & Pink
Base Film Thickness	4.5 μ \pm 0.5 μ
Total Thickness	7.5 μ \pm 1.0 μ
Ink Melting Point	90°C
Print Speed	Up to 100mm/Sec

Features

HL35 is a resin ribbon for flat head printers. It is designed for printing care label and standard label media with resistance to washing, dry cleaning, ironing and steam pressing. It will withstand the harshest industrial environments. Resists Petrol. Approved for direct food contact.



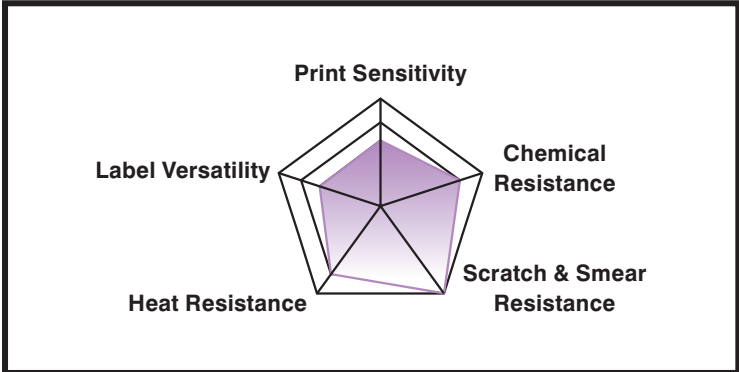




- ### Receiving Label Media
- Synthetic media (PE, PP, PVC, PET etc)
 - Textile care label media

- ### Typical Applications
- Wash care labelling
 - Chemical & solvent labelling
 - Food labelling

Approvals

REACH / SVHC Free	1907/2006/EC
FDA Listed	Listed in the drug master file for medical / pharmaceutical applications
UL Approval	On specific label media
Direct Food Contact	1935/2004/EC
Chemicals in toys	EN71-3 : 2013
Colour fastness to washing	BS EN ISO 105-CO6:2010 (with Dynic care label range)
Colour fastness to dry cleaning	BS EN ISO 105-DO1:2010 (with Dynic care label range)

Storage Recommendations

5°C to 35°C - 30% to 80% relative humidity
 Best results obtained when printing within **12 months** of manufacturing date.
 Keep away from direct sunlight